


Description

A premium portable solar lighting solution on a hinged galvanised steel 6m light pole is ideal for workzones and off-grid applications. Featuring smart controls, motion detection, and a high-capacity battery for 7+ days of reliable dusk-to-dawn performance. The 6m hinged pole allows easy deployment, with multiple base options and built-in lifting points for versatile installation and mobility.


Features

- Premium grade commercial solar lighting
- Hinged galvanised steel 6m light pole
- Unique base with hinge design allows for ease of deployment
- Optional remote programmable smart lighting
- Massive 72Ah battery capacity (up to 12.8V)
- 3 base options rated to suit wind regions A, B and C
- The rotationally molded plastic base has an indented space for branding signage and can be customised to suit your business in a range of colours

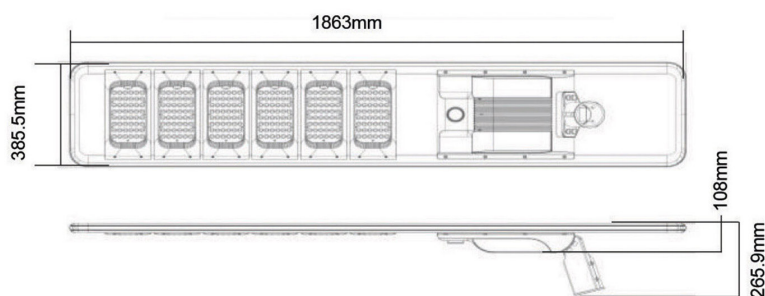


Light Distribution

1	3567	198
2	892	395
3	396	593
4	223	791
5	143	988
H(m)	E(x)	D(cm)

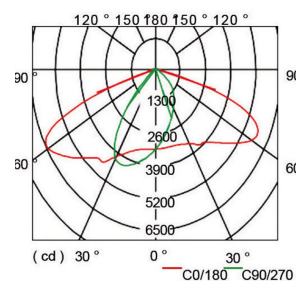

Wind Rating Guide



Light Head Specifications

Product Code	Efficiency	Lumens	Colour Temperature	CRI	Beam Angle	Weight	Battery Capacity	Light Output
F20100200	207lm/W	15525lm	5000K	Ra≥70	150° x 60°	24kg	12.8V/72Ah	75W

Base Specification

Hinged Pole	Plastic Base Wind Region A & B	Single Concrete Block Wind Region A	Double Concrete Block Wind Region B & C
Product Code	K20100203	K20100200	K20200110
Overall Height	6.0m	5.8m	6.1m
Base Weight	1080kg	650kg	1590kg
Overall weight of a complete light with a hinged pole	1184kg	754kg	1694kg

Please refer to saferoads.com.au for the most up to date specifications

SEP 2026

